



ANCHOR®
BUILD SOMETHING BEAUTIFUL

Trestone™
RETAINING WALL SYSTEM

PRODUCT INFORMATION



Crafted with a distinctive face texture, the Trestone™ retaining wall system provides an aesthetically pleasing, nontraditional look for landscaping projects up to 2 feet high, including base course, but excluding the cap.* A complementary cap completes the system.

Lightweight and easy to handle, the Trestone product is perfect for smaller-scale projects – borders, planter rings, raised gardens and small retaining walls.

Plus, the Trestone product features the original rear-lip locator for quick and easy installation.

*This height assumes level backfill and clean, compacted sand or gravel and no surcharge.

**No pins. No mortar.
No misalignments.**

Rear-lip locator, invented by Anchor, makes installation fast and accurate. Anchor – the original rear-lip product!



PRODUCT INFORMATION

Wall Block Quantities

| Wall Height* | Number of Courses** | Wall Length | | | | |
|--------------|---------------------|-------------|-----|-----|-----|-----|
| | | 5' | 10' | 15' | 20' | 50' |
| 0'6" | 2 | 14 | 27 | 40 | 54 | 134 |
| 0'9" | 3 | 20 | 40 | 60 | 80 | 200 |
| 1'0" | 4 | 27 | 54 | 80 | 107 | 267 |
| 1'3" | 5 | 34 | 67 | 100 | 134 | 334 |
| 1'6" | 6 | 40 | 80 | 120 | 160 | 400 |
| 1'9" | 7 | 47 | 94 | 140 | 187 | 467 |
| 2'0" | 8 | 54 | 107 | 160 | 214 | 534 |

Cap Block Quantities

| Wall Type | Wall Length | | | | |
|-----------|-------------|-----|-----|-----|-----|
| | 5' | 10' | 15' | 20' | 50' |
| Straight | 5 | 10 | 15 | 20 | 50 |
| Curved | 6 | 11 | 17 | 22 | 55 |

*Including buried base course

If the section is one, two or three courses high, **bury one-half of the first course for walls of any size. If the section is four courses or higher, the full first course must be buried.



| Units | Wall | Cap |
|---------------------------|---------------|---------------|
| Approximate Dimensions*** | 3" x 9" x 6" | 2" x 12" x 8" |
| Approximate Weight*** | 10 lbs. | 14 lbs. |
| Coverage | 0.19 sq. ft. | 1.00 lin. ft. |
| Setback/System Batter | 9/16" / 10.6° | |
| Minimum Inside Radius | 2'0" | |
| Minimum Outside Radius | 1'6" | |


***Product dimensions are height by face length by depth. Actual dimensions and weights may vary from these approximate values due to variations in manufacturing processes. Specifications may change without notice. See your Anchor representative for details, color options, block dimensions and additional information.

© 2011 Anchor Wall Systems, Inc. The Trestone™ wall system is manufactured under license from Anchor Wall Systems, Inc. (AWS). The "Anchor A" and "Anchor Build Something Beautiful" logos and "Trestone" are trademarks of AWS. The wall system blocks are covered by the AWS Limited Warranty. For a complete copy, visit your local dealer or see anchorwall.com.

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.

A&B0810

71.3061.1 08/11 4015

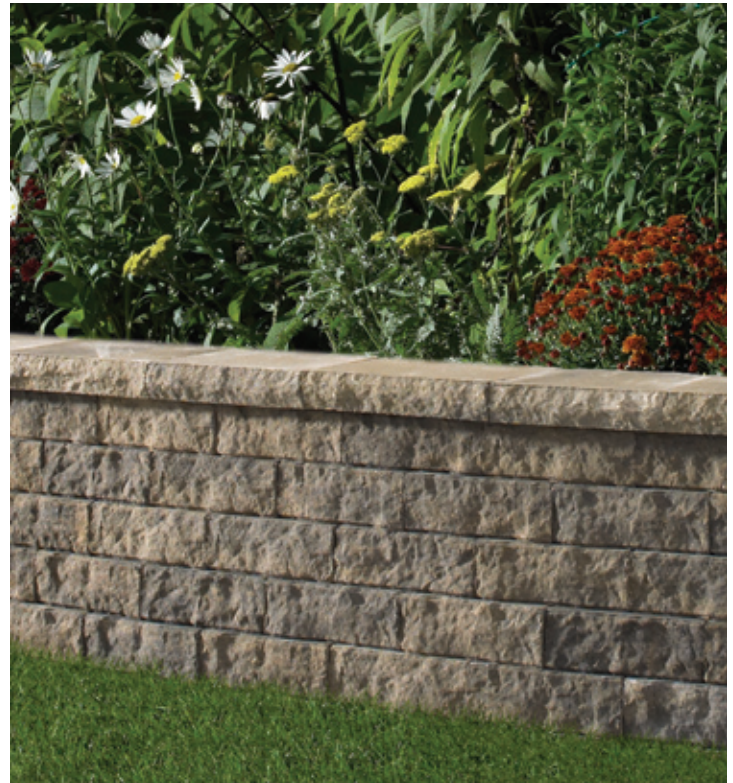

See anchorwall.com for installation instructions.

The rear-lip locator makes alignment easy. Just stack each block with the rear lip facing down on the course below and pull block forward until the lip touches the back of the lower block.

